




PF100

100 Watts Output Power

ACTIVE POWER FACTOR CORRECTION & HARMONIC ATTENUATION MODULE



HOW TO ORDER

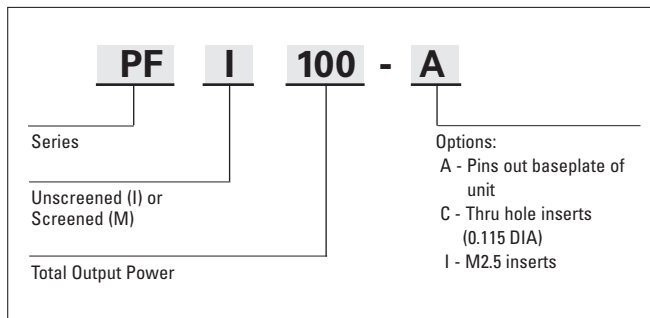

FEATURES

- Meets all Requirements of MIL - STD - 1399, section 300A
- Meets CE01 and CE101 of MIL - STD - 461 without external filter
- Meets all requirements of MIL - STD - 704E
- Meets all requirements of ABD0100.1.8.1
- Non-latching Over Temperature Protection
- Non-latching Output Overvoltage Protection
- Output short circuit protection, automatic recovery after short circuit removal
- Isolated Output DC Good TTL Signal (Open collector)
- Full 100 Watts of output power from 85 VAC to 265 VAC and up to 100°C baseplate temperature
- Utilizes non isolated boost topology
- Dual Nominal Voltage setting:
 275V for 85 - 170 Vrms Input
 380V from 180 - 264 Vrms Input
- Environmental Screening available

INPUT CHARACTERISTICS

	Min.	Typ.	Max.	Units
Input Voltage (Single Phase)	85		265	VAC
Input Frequency Range	45		800	Hz
Inrush Current				
@115 Vrms			3	A
@240 Vrms			5	A
Power factor at Full Load				
115V _{in} / 60 - 400Hz	0.98	0.99		
115V _{in} / 800Hz	0.94	0.96		
230V _{in} / 50Hz	0.97	0.99		
230V _{in} / 400Hz	0.92	0.93		
230V _{in} / 800Hz	0.79	0.80		
Efficiency at Full Load				
115V _{in} / 60Hz	92	93		%
115V _{in} / 400Hz	91	92		%
230V _{in} / 50Hz	92	93		%
230V _{in} / 400Hz	92	93		%
230V _{in} / 800Hz	92	93		%

OUTPUT CHARACTERISTICS

	Min.	Typ.	Max.	Units
Nominal No Load Voltage Setting	273 or 380		278 or 385	V
Output Power (Full Load)			100	W
Load Regulation (No Load - Full Load)			2.2	% V _{out}
Line Regulation (Low Line - High Line)			1	% V _{out}
Ripple P - P (60 Hz/115 VAC input)			3.5	% V _{out}
Overvoltage Protection (% of Output)	103	105	110	% V _{ou}
Transient Response: 25 - 75 - 25% or 50 -100 - 50% step load				
Overshoot / Undershoot		±6.3		% V _{out}
Recovery time (to 2% of V _{out})			200	mS
Temperature Drift		0.01	0.02	% / °C
Output (Holdup) Capacitance		Not Included		
		(specs are based on 100µF)		

All specifications are typical @+25°C with nominal input voltage under full output load conditions and holdup capacitance of 100 µF, unless otherwise noted. Specifications subject to change without notice.



PF100 ACTIVE POWER FACTOR CORRECTION & HARMONIC ATTENUATION MODULE

TEMPERATURE CHARACTERISTICS

	Min.	Typ.	Max.	Units
Operating	-55		+100	° C
Storage - Ambient	-55		+105	° C
Over Temperature Shutdown		+105	+115	° C
Hysteresis		10		° C
Thermal Resistance Case- Ambient		7.14		°C/W

M- GRADE - ENVIRONMENTAL SCREENING

Stabilization Bake	+105°C for 24 hours similar to MIL -STD -883, M1008.2, Condition B
Temperature Cycling	10 cycles at -55°C to +125°C (transition period 5°C / minute) similar to MIL -STD -883, M1010, Condition B
Burn in	160 hours @ 85°C minimum
Final Testing	Full ATP

I- GRADE - ENVIRONMENTAL SCREENING

Burn in	16 hours @ 50°C minimum
Final Testing	Full ATP


ISOLATION CHARACTERISTICS

	Min.	Units
Isolation:		
Input/Output to Base	1500	VAC
Insulation resistance @ 500 VDC	100	MOhm

MECHANICAL CHARACTERISTICS

Weight (Max.)	5.5	oz.
	150	grams
Size	2.4 x 2.3 x 0.5	inch
	61 x 58.4 x 12.7	mm
Volume	2.76	inch ³
	45.7	cm ³
Material:	Pin	Brass (Solder Plating)
	Case	Steel (28 Gauge CRS)
	Baseplate	Aluminum (6061-76)
Finish:	Case	Nickel Plating
	Baseplate	None
Mounting:	Standard	4-40 THD Inserts
	Option - I	Metric M2.5 - 0.45 Inserts
	Option - C	.115 DIA Thru Hole


CASE DRAWINGS - PF100 STANDARD

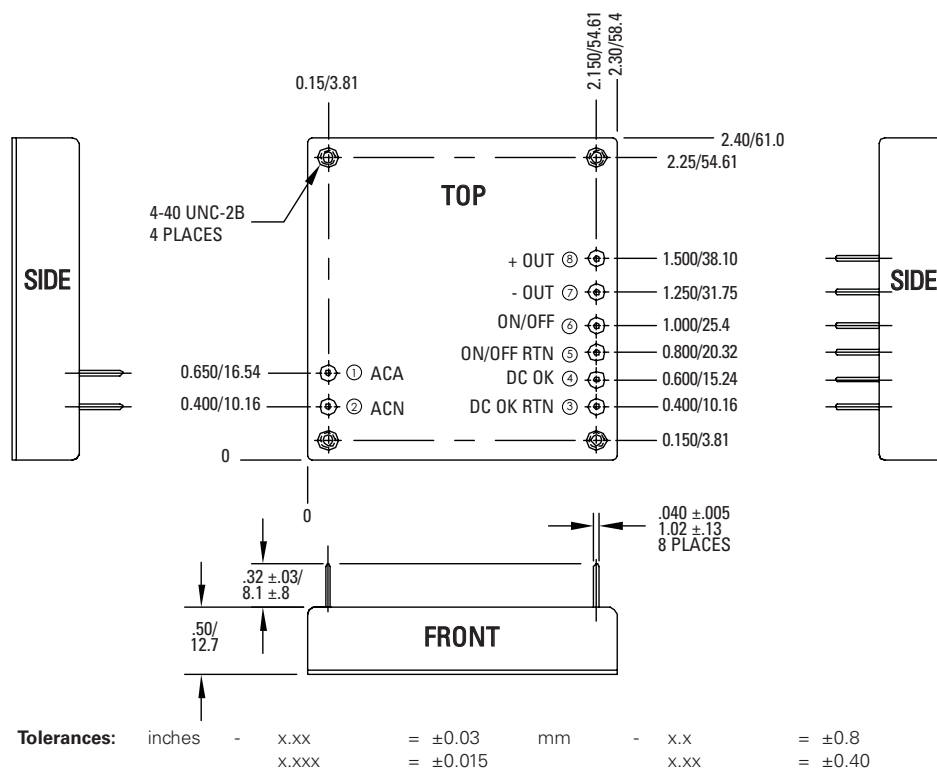


All specifications are typical @+25°C with nominal input voltage under full output load conditions and holdup capacitance of 100 µF, unless otherwise noted. Specifications subject to change without notice.



CASE DRAWINGS - PF100 OPTION -A; PINS OUT BASEPLATE OF UNIT

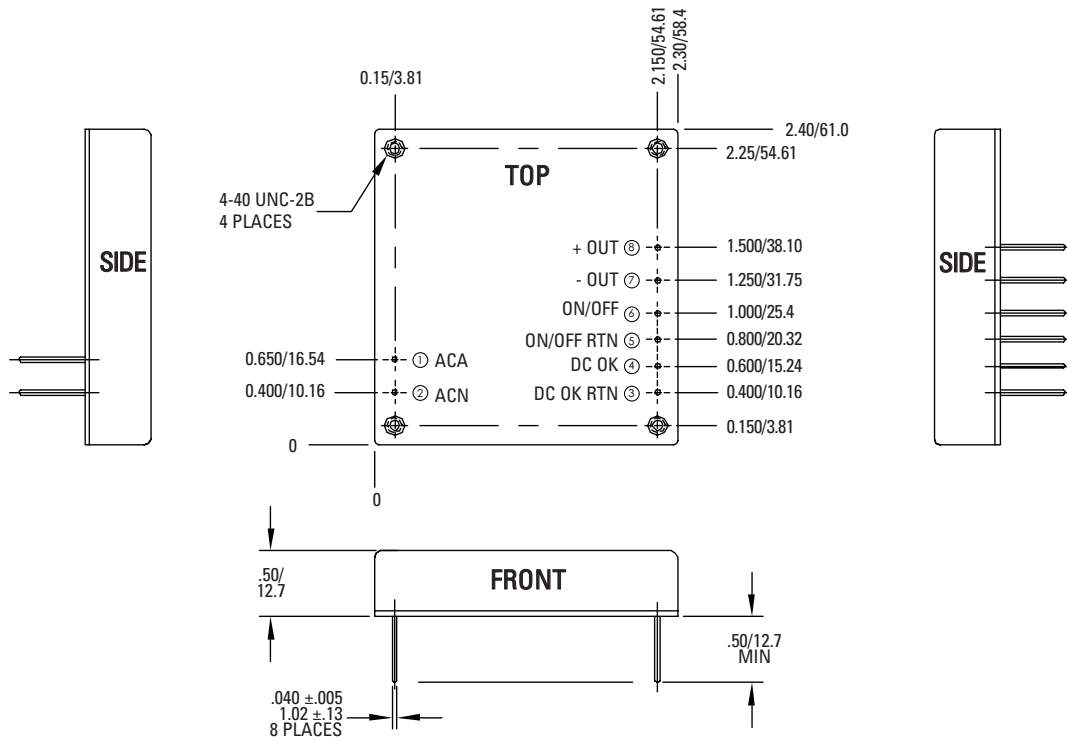

CASE DRAWINGS - PF100 OPTION -C; THRU HOLE INSERTS

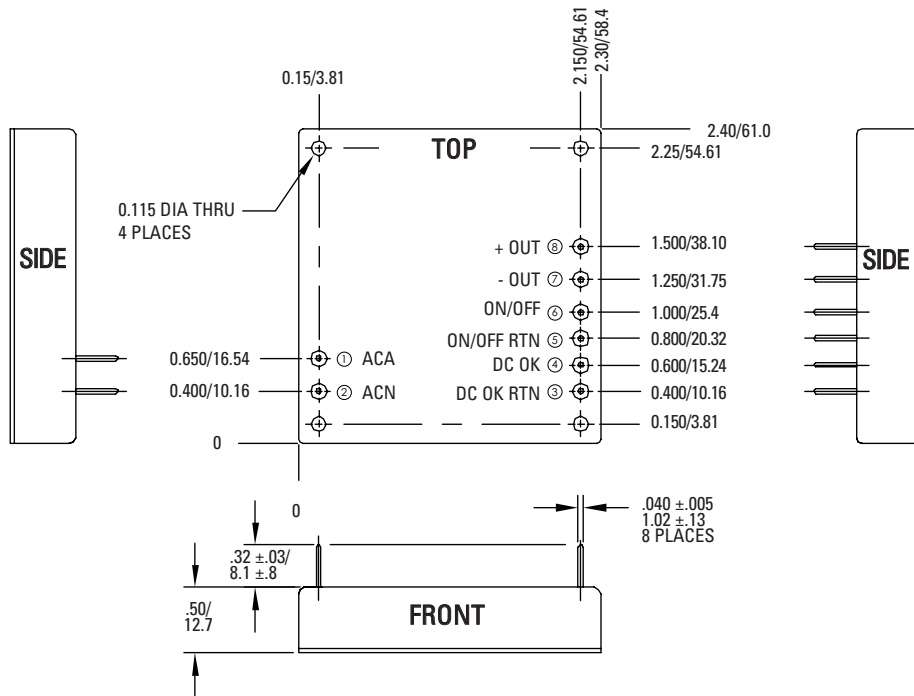


All specifications are typical @+25°C with nominal input voltage under full output load conditions and holdup capacitance of 100µF, unless otherwise noted. Specifications subject to change without notice.




PERFORMANCE CHARACTERISTICS

PF100


I. Power Factor vs. Input Voltage

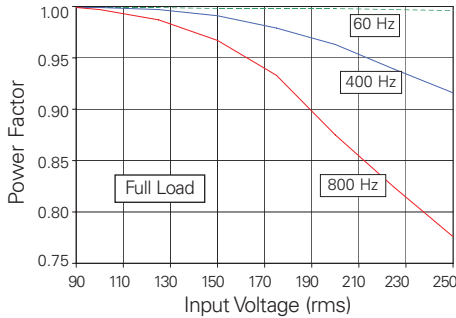


II-a. Power Factor vs. Output Power

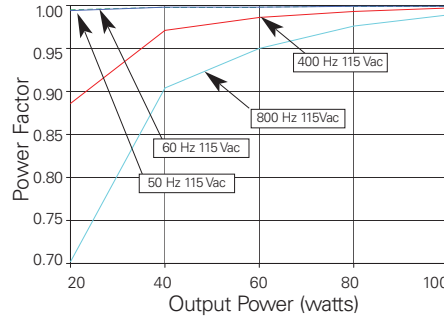


II-b Power Factor vs. Output Power

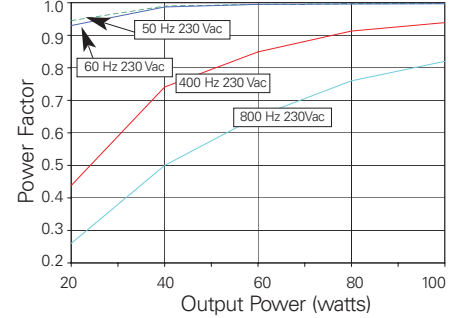


III-a. Efficiency vs. Input Voltage

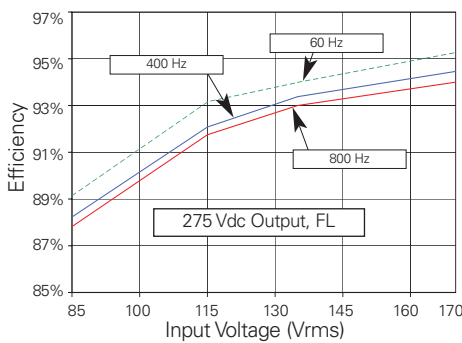


III-b. Efficiency vs. Input Voltage

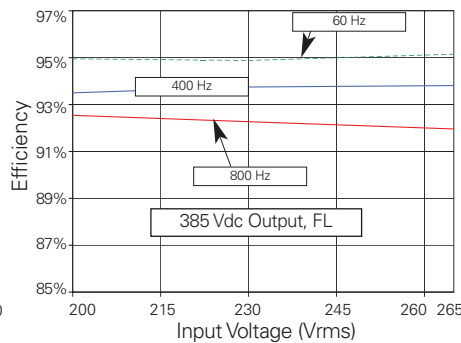


IV. Efficiency vs. Output Power

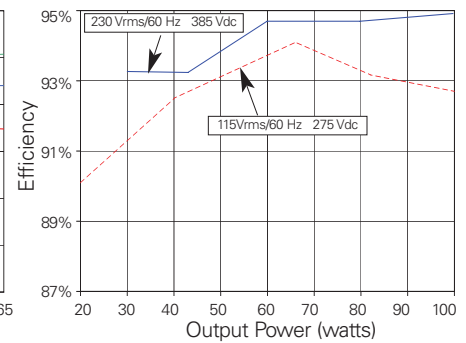


V-a. AC Input Voltage & Current

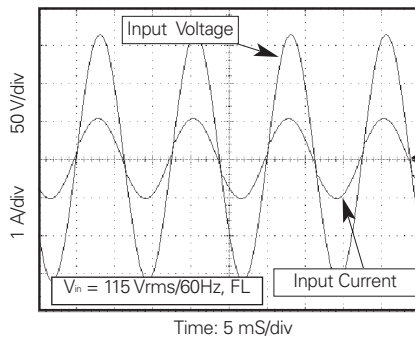


V-b. AC Input Voltage & Current

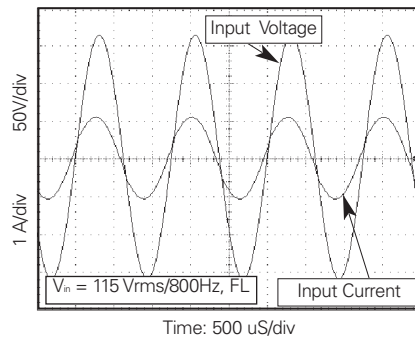


VI. Output Ripple

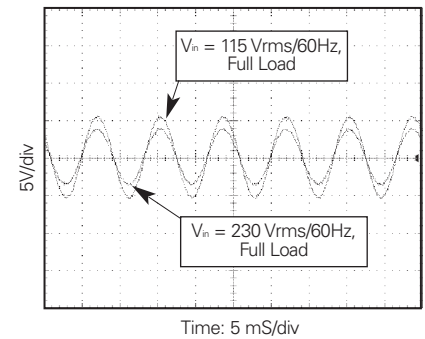


VII. Load Transient Response

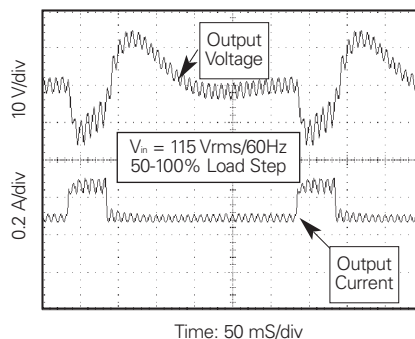

VIII. Line Transient

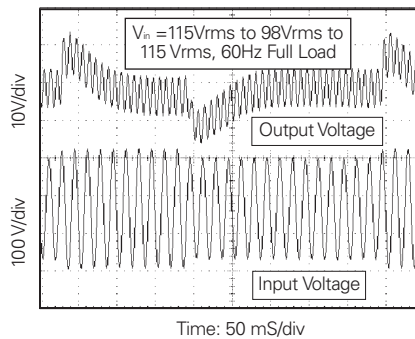


IX-a. Harmonic Distortion

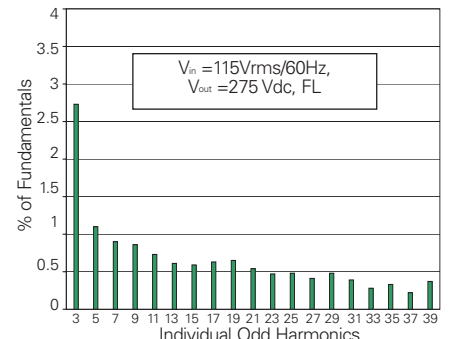





IX-b. Harmonic Distortion

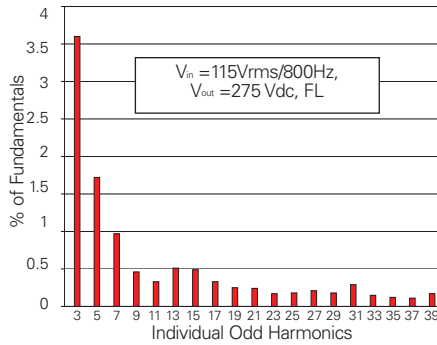


X-a. Inrush Current vs Output Voltage

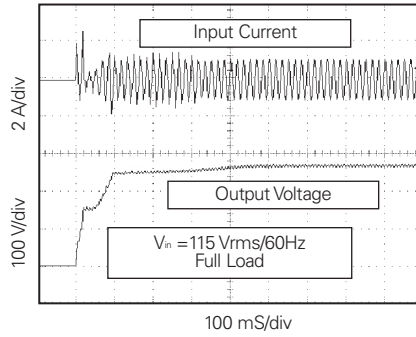


X-b. Inrush Current vs Output Voltage

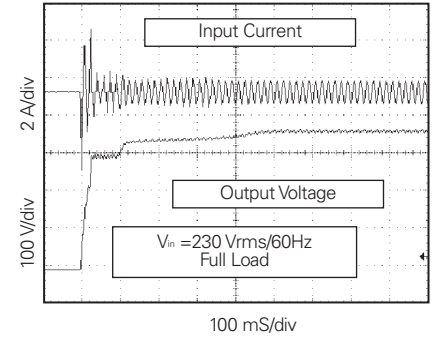


XI. DC Good, Turn-On

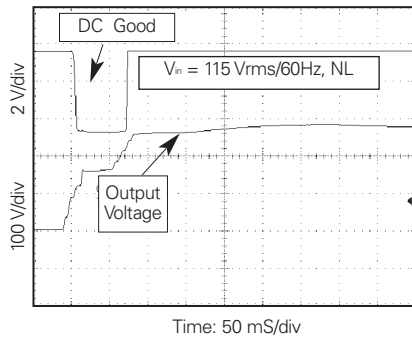


XII. DC Good, Turn-Off

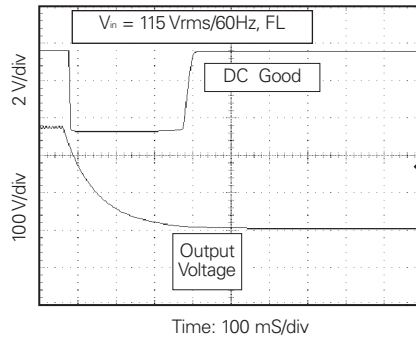

XIII-a. Input Line Dropout

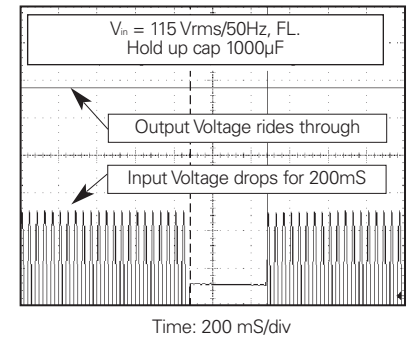

XIII-b. Input Line Dropout

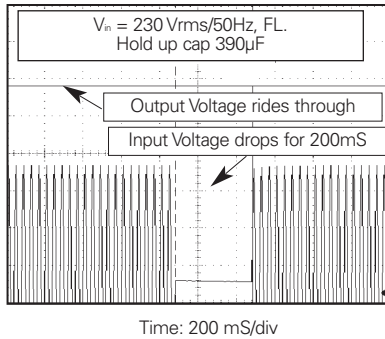

EMI Plots

